

NOTES:




1. ALL MATERIALS AND COMPONENTS MUST BE RoHS COMPLIANT.

Rev	Date	Content	Approver
V1	2018-04-20	新图纸	

正视图

侧视图

背视图

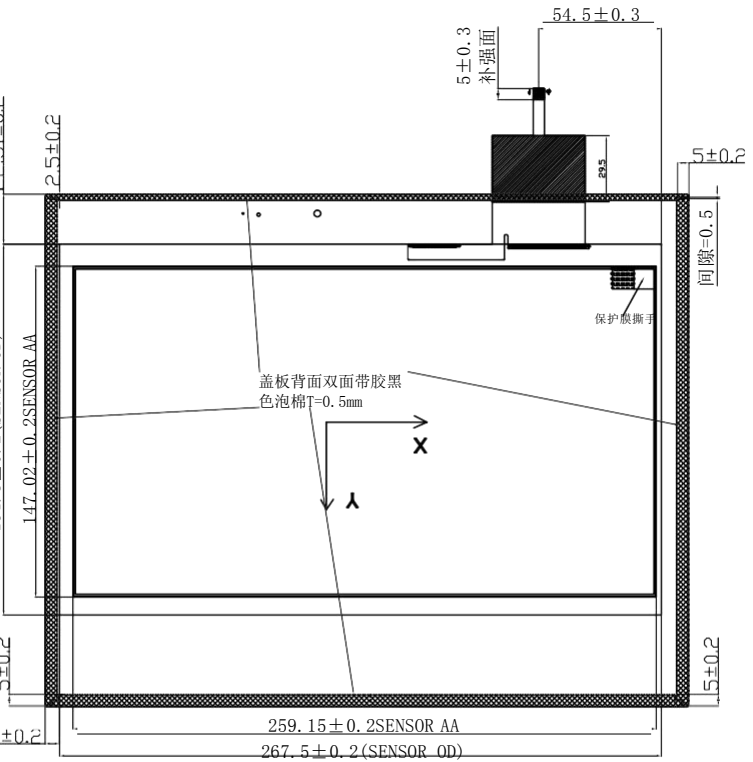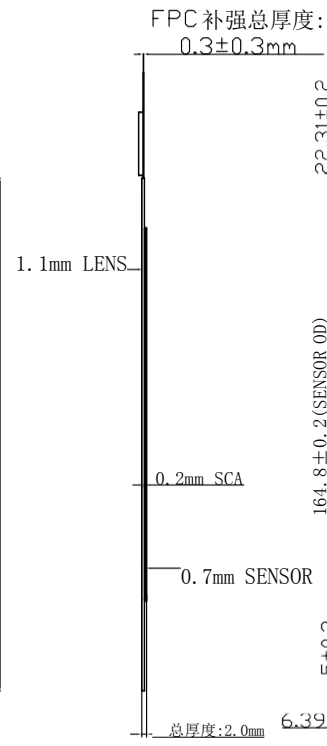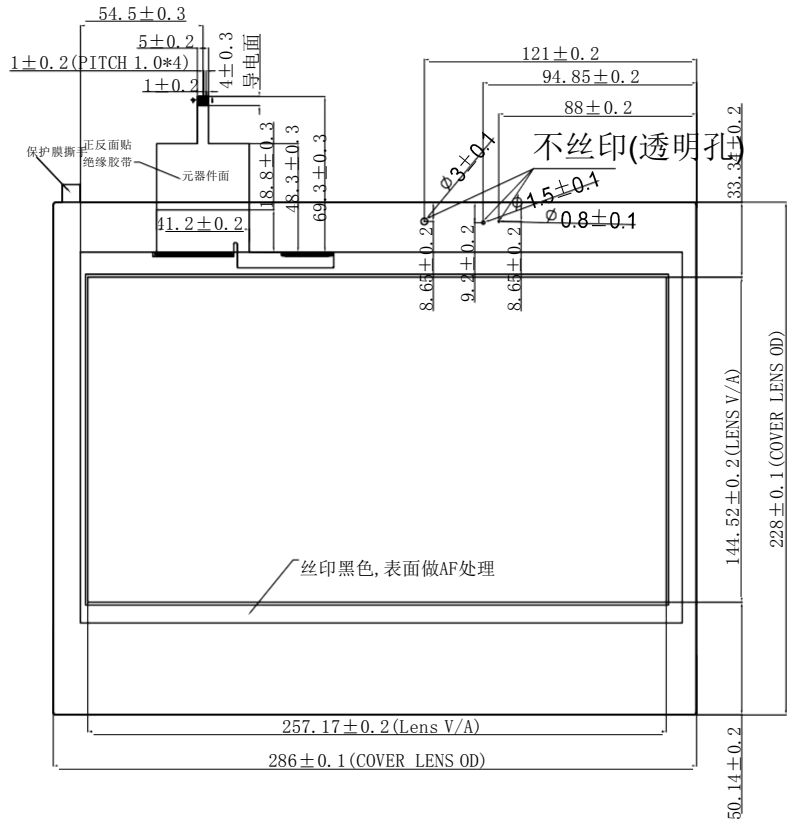

技术参数: AF: 摩擦水滴角≥100°, 鋼絲絨20x20mm, 荷重1000g, 來回2500次

- 产品结构: COVER Glass +ITO GLASS+FPC+泡棉
- 表面硬度: ≥6H
- 透光率: ≥85%
- IC: ILITEK2510(通道TX52*RX30)
- 工作环境: -10°C~+60°C, ≤90%RH
- 储存环境: -20°C~+70°C, ≤90%RH
- 未注尺寸公差为±0.2mm

INTERFACE USB

PIN NO.	PIN NAME
1	VBUS 5V
2	D+
3	D-
4	GND

*符合RoHS指令

Unit: mm	SIZE: A4		<h1>PANASYS</h1>
Tolerances: ±0.2	Page: 1 of 1		
Confirm By:	Date:	Product NO:	
Checked By:	Date: 2018-04-20	Drawing NO: HB-GG1162A1-V01 工程图	
Drawn By:	Date:	Customer Product NO:	

If You Have Any Question, Please Contact Please Confirm This Drawing